9300FTZ Oras Electra Servantkran, 230/9 V, Bluetooth

Valid from 11/2023

EAN: 6414150101854
NRF: 4203747
static.oras.com/9300FTZ



Electra 93 series is giving you a whole new modern design with its rounded square body and spout giving you new fresh and updated design.
The tall design compliments the new trends of modern bathroom of more square design and shallow sinks, where the extra height gives you more comfortable usage.

Key Features
Aerator with Tilt function +/- 10° for more flexible installation
Newest Sensor technology for better detection and operation comfort
Bluetooth technology for easy adjustment to personalize settings
Power Plug

- Servant
- Public, Industri, Housing
- Berøringsfri, Omformer for stikkontakt, Bluetooth®, Blyfri
- Benkemontert
- Forkrommet
- Fast tut
- PCA® strålesamler med konstant vannmengde uavhengig av trykk, Justerbar vannstråle
- Temperaturreguleringshendel
- Justerbar varmtvannsbegrenser (ettermonterbar)
- Manuell blandeventil, Tilbakeslagsventil, Smussfilter
- Advanced PSD sensor, Omformer inkludert, Signallys
- Fleksible slanger
- 3S Installasjon

Teknisk data

Tekniske egenskaper

Varmtvannsforsyning	**max. +70°C**
Arbeidstrykk	**100 - 1000 kPa**
Tilkoblingsstørrelse	**G3/8**
Projeksjon	**118 mm**
Tilbakeslagssikring (EN1717)	**EB**
Materiale	**Composite**

Program instillinger


Etterrenningstid	**3 s (1-20 s)**
Automatisk spyling	**off (off/1-120 h)**
Automatisk spyling periode	**30 s (1-1800 s)**
Funksjonstid	**2 min (1 - 1800 s)**

Elektroniske attributter


Elektrisk tilkobling	**230 / 9 V**
Bluetooth version	**5.x (D060576)**


Bestemmelser

EU Directive	**CE Radio Equipment Directive 2014/53/EU , Low Voltage Directive 2014/35/EU , EMC Directive 2014/30/EU , RoHS Directive 2011/65/EU**
EN Standard	**EN 15091, ETSI EN 301 489-1 V1.9.2 , ETSI EN 300 328 v2.2.2 , EN 61000-6-1:2007 , EN 61000-6-3:2007+A1:2011+AC:2012 , EN 60335-1:2012+A11+A13+A1+A14+A2+A15:2021, Part 19.11.4**
Støyklasse	**I (ISO 3822)**
Tetthetsklasse	**IP 55 / transformer IP 20**

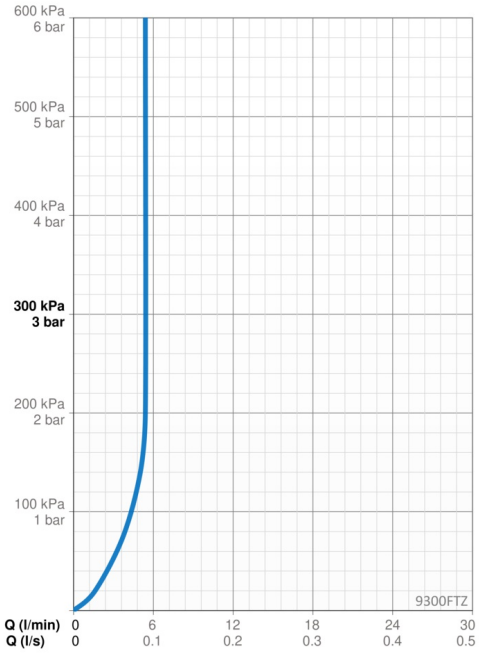

© 2023 Oras Ltd. - www.oras.com - 02.09.2023

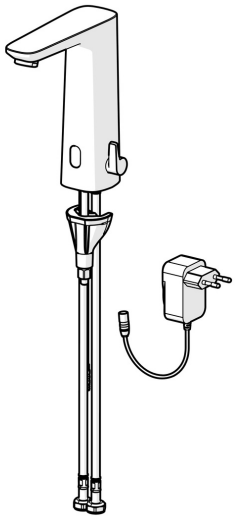

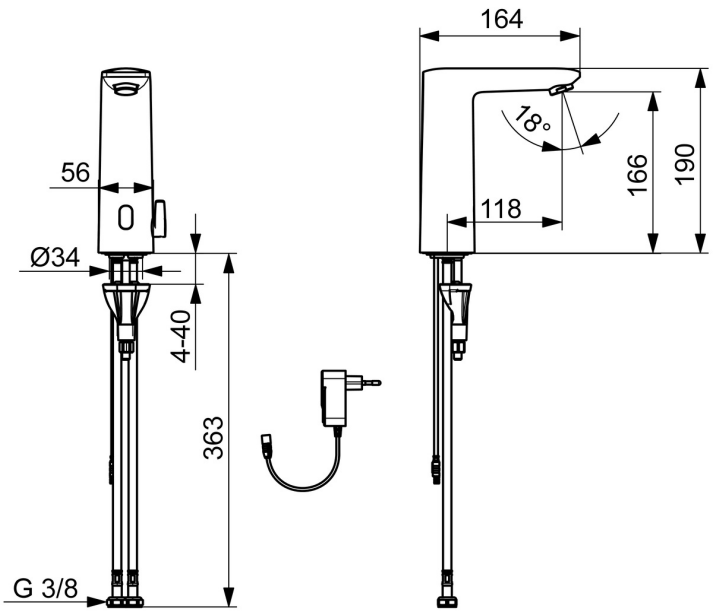
164
18°
166
190
118
56
Ø34
4-40
363
G 3/8